

S1930E/1932E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric micro scissor lifts
- Compact & nimble
- Drives through a standard doorway
- Lightweight model for restricted floor loadings
- Suitable for indoor and outdoor use
- Easy to use & maintain

 **snorkel**
www.snorkellifts.com

ELECTRIC SLAB SCISSOR LIFTS

S1930E/1932E



DIMENSIONS	S1930E	S1932E
Max. working height	25 ft	25 ft
Max. platform height (A)	19 ft	19 ft
Platform size (stowed)	61.5 in x 29 in	61.5 in x 29 in
Platform size (extended)	97.5 in x 29 in	97.5 in x 29 in
Deck extension length	36 in	36 in
Overall length (C)	6 ft 2 in	6 ft 2 in
Overall width (D)	30 in	32 in
Stowed height	6 ft 7 in	6 ft 7 in
Wheelbase	4 ft 6 in	4 ft 6 in
Ground clearance (stowed)	2.5 in	2.5 in
Ground clearance (elevated)	0.75 in	0.75 in

PERFORMANCE	S1930E	S1932E
Platform capacity (SWL)	500 lbs	500 lbs
Max. drive height	19 ft	19 ft
Max. drive speed (stowed)	2.0 mph	2.0 mph
Max. drive speed (elevated)	0.4 mph	0.4 mph
Raise/lower time	20/26 seconds	20/26 seconds
Gradeability	25%	25%
Inside turning radius	5 in	5 in
Outside turning radius	64.5 in	64.5 in
Tires	12 x 4.0 in non-marking solid rubber	
Controls	proportional	proportional
Drive system	2 wheel drive	2 wheel drive

POWER	S1930E	S1932E
Power source	4 x 6V 220 amp hour batteries	
Charger	90 - 240V, 25 amp	

WEIGHT	S1930E	S1932E
Weight	3,160 lbs	2,980 lbs

TURNING RADIUS

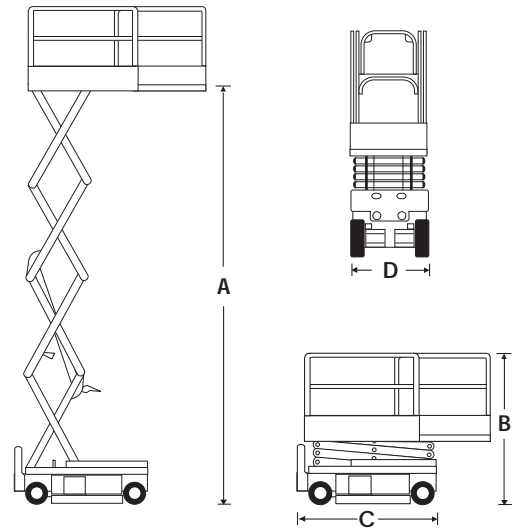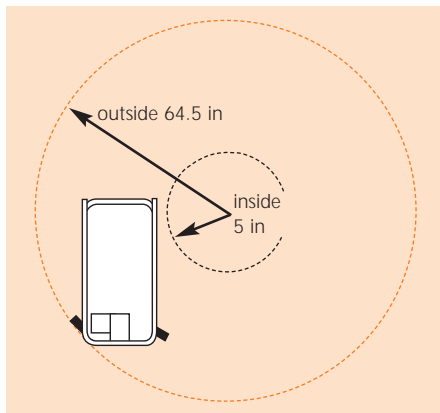

STANDARD FEATURES

- Pothole protection system
- Non-marking tires
- Proportional controls
- Roll out deck extension with foot pedal release
- 2 persons + equipment capacity indoors
- 1 person + equipment capacity outdoors
- Power line to platform
- Swing-out service trays
- Hour meter
- Swing rear guardrails for sheet loading
- Key switch
- ANSI compliant

OPTIONS

- Special paint colors
- Flashing amber light
- Swing gate
- 110V AC 800W inverter
- Dual lanyard anchorage point
- Environmental green oil
- CSA compliant

snorkel

www.snorkellifts.com

P.O. Box 1160
 St. Joseph, MO 64502-1160, USA
 Tel: 1 (785) 989-3000
 Toll-free: 1 (800) 255-0317
 Fax: 1 (785) 989-3070
 Email: sales.usa@snorkellifts.com